



optimal

350



Tree Spade



Requirements for Power Unit:

A Wheel Loader, Skid Steer Loader, Telescopic Loader

1 extra hydraulic circuit, double-acting, for implement attachment at front

- hydraulic working pressure 140 - 180 bar (2,000-2,560 lbs./in²)
- oil flow 20-30 l per minute (5-8 GPM)
- tipping load approx. 400 kg (880 lbs.)
- lift capacity approx. 250 kg (550 lbs.)
- type of attachment quick-change frame or frame for fixed attachment
- controls: electro-hydraulic valves
rotary control switch

B Mini Excavator

1 extra hydraulic circuit, double-acting, for implement attachment at front

- hydraulic working pressure 140 - 180 bar (2,000-2,560 lbs./in²)
- oil flow 20-30 l per minute (5-8 GPM)
- operating weight 1,5 – 2,5 t
- type of attachment quick-change frame or frame for fixed attachment
- controls electro-hydraulic valves
rotary control switch

C Special Attachments please enquire



optimal

350






Tree Spade

Basic Machine:

upper rootball diameter, approx.	A	36 cm	(14")
rootball depth, approx	B	30 cm	(12")
working height	C	78 cm	(31")
working width, gate closed	D	69 cm	(27")
working width, gate open	E	99 cm	(39")
clearance between open gate	F	48 cm	(19")
inner frame diameter	G	28 cm	(11")
weight, empty		150 kg	(330 lbs.)
volume of rootball, approx.		15 L	(4 gallons)
number of blades		3	

Special Features

- self-lubricating bearings, abrasion-resistant
- inner frame and outer frame
- adjustable spade alignment

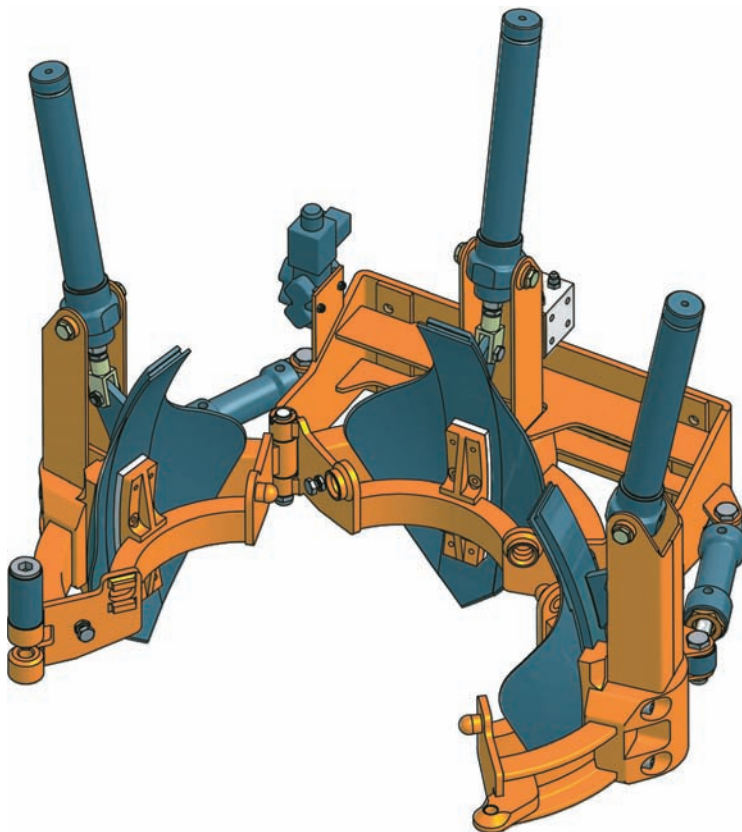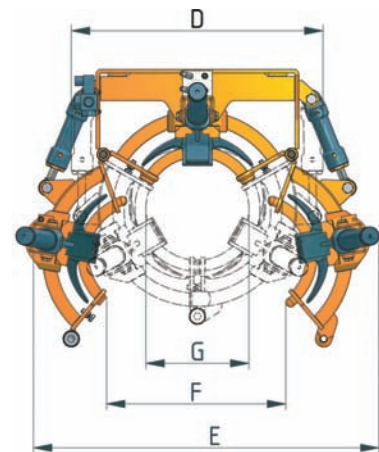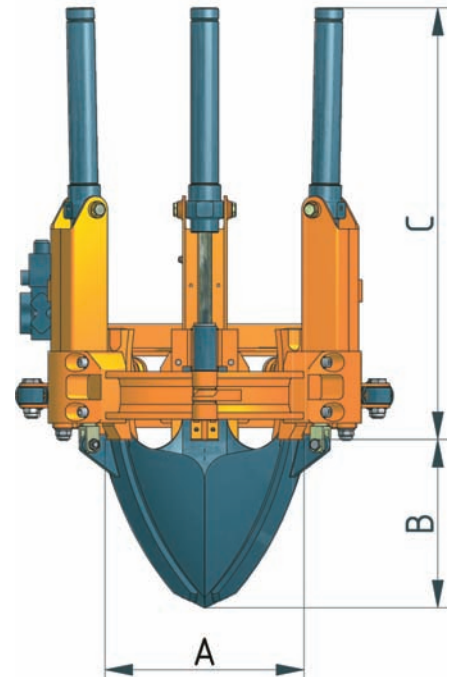

rotary control switch



Manufacturer:



Optimal-Vertrieb Opitz GmbH
 Eysölden M 41
 91171 Thalmassing
 Deutschland
 Tel. +49 91 73/79 18 0
 Fax. +49 91 73/79 18 49
 info@opitz-optimal.com
 www.opitz-optimal.com